
ARDEX SURFACES; A LUXURY TO THE SENSES



panDOMO®





ARDEX SURFACES
IS A RANGE OF
DECORATIVE
FINISHING SYSTEMS
FOR SURFACE
DESIGNS THAT KEEP
ALL ARCHITECTURAL
POSSIBILITIES OPEN,
BE IT CLASSICAL,
CONTEMPORARY, OR
INDIVIDUALISED.



The ARDEX Surfaces cover PANDOMO® and ARDEX system to create a decorative and functional finish for commercial and residential living spaces. The ARDEX Surfaces products protect the wall and floor with various aesthetic effects on the surface through individual colours, shades, aggregates, effects, and techniques.

The extensive ARDEX Surfaces collection offers a perfect solution to every design with high-quality elements. The latest innovation of ARDEX Surfaces allows you to cover walls, ceilings and floors with least joints using the same material.

ARDEX Surfaces allow a wide array of finished surfaces with a unique touch. A modern and timeless approach to the wall and floor surfacing range, perfect for artistic finishes that can match any designer's vision.





ARDEX Surfaces uses an exclusive self-drying technology that allows fast installation, which offers a real economic alternative to traditional methods without compromising quality.

With the ARDEX Surfaces system, you can create an ooze of openness, harmony and modernity that gives homeowners the versatility to choose among minimalistic, retro, industrial and many other themes effortlessly.

Every design is one of a kind as they are done and crafted by hand, resulting in the wall and floor finishing unique to each home.

ARDEX offers a one-stop solution for all your renovation needs. Our very own experienced ARDEX-trained applicators will be there to meet all your requirements for your dream home through our dedicated technical service team at ARDEXacademy.

GET THE BEST SURFACES BY ARDEX, PROVIDERS OF HIGH-PERFORMANCE BUILDING MATERIALS



Surface preparation

- ARDEX Feather finish
- ARDEX A 46
- ARDEX A 35
- PANDOMO® ATS

Primer

- ARDEX P 51
- ARDEX R 2 E

Decorative Finishing

Wall

- PANDOMO® Wall
- ARDEX F 5

Floor

- PANDOMO® K1
- PANDOMO® K2
- PANDOMO® BG
- PANDOMO® BW
- ARDEX K 390

Wall and Floor

- PANDOMO® Studio

Protective Sealer

- PANDOMO® SP-SL
- PANDOMO® SP-GS
- PANDOMO® SP-MS
- PANDOMO® SP-PS
- PANDOMO® Impregnation
- ARDEX R 55 EP
- ARDEX 330

Maintenance

- PANDOMO® Basic cleaner
- PANDOMO® Maintenance cleaner
- PANDOMO® Care and Clean



THE RICHNESS OF TEXTURE







SURFACES FOR A RANGE
OF EXPRESSIONS



panDOMO® Wall

PANDOMO® W1

PANDOMO® W1 Decorative Finishing Render is made of special cement, flexible polymer additives and selected fillers.

The powder is mixed with water to give a supple mortar which can be applied as a finishing compound in both thin and thick layers. The hardened render is inert, virtually tension free and vapour permeable.

USE

Installation of illustrative finishes characterised by a creative design, such as surfaces in exhibition rooms, foyers, commercials, retails and private residences.

FEATURES & BENEFITS

- For creating and designing the surfaces of walls and ceilings in internal areas
- Hardens and dries rapidly to a stress-free layer without cracks in all thickness
- Easy to apply
- Multi-colours
- Excellent adhesion
- Sealing with recommended sealers to make abrasion and water resistant

THICKNESS APPLICATION

Install from 2 – 3 mm

WALL FINISHES

Single colour,
smooth, soft
cloud-like look

Single colour,
smooth textured

Single colour,
slate textured



panDOMO® Floor

PANDOMO® K1

PANDOMO® K1 Floor Design Levelling Compound is a white powder with special cements, good dispersible synthetic substances and selected fillers. Mixed with water, the product produces a pliable, self-smoothing mortar. The mortar cures by hydration and drying to a compound which is stress-free as to virtually exclude the risk of crack-formation.



USE

For producing prestigious, creatively designed visual and wearing surfaces subject to moderate shock and impact loads, e.g. in high-end boutique, hotels, cafés, vestibules, private living areas, exhibition halls, etc.

FEATURES & BENEFITS

- For layer thicknesses of from 5 to 10 mm
- Good flow and self-recovering properties
- Crack-free even in thick layers
- Trowel-able and pump-able
- Rapid drying with minimum downtime
- Allows sanding / polishing after 24 hours
- Multi-colours
- Sealing with recommended sealers to make abrasion and water resistant
- Easy to clean and maintenance

THICKNESS APPLICATION

Install from 5 – 10 mm



3
Andrea Schmeiser
Auskunft
Bestattungswesen
Straßenverkehr
Gemeindestraßen

panDOMO® Loft

PANDOMO® K2

PANDOMO® K2 Design Thin Layer Compound is a white powder with special cements, well dispersionable polymers and selected fillers. When mixed with water, the result is a paste like, trowelable but not self leveling mortar. The mortar hardens by hydration and drying to a very low tension material. Applied on substrates, which fulfill the norms, cracks can virtually be excluded.

USE

To create representative, creatively designed floor surfaces with normal requirements regarding the resistance of impacts as e.g. in boutiques, shops, restaurants, cafés, lobbies, residential areas, exhibition areas etc.

FEATURES & BENEFITS

- High surface strength
- Low tension
- Rapid drying with minimum downtime
- Allows sanding / polishing after 24 hours
- Multi-colours
- Sealing with recommended sealers to make abrasion and water resistant
- Easy to clean and maintenance

THICKNESS APPLICATION

Install from 2 – 4 mm





panDOMO® Studio

PANDOMO® Studio Decorative Thin-layer Design Smoothing Compound is a white powder consisting of special cements, plasticising synthetic additive powders, selected fillers, Microtec fibres and special additives. For designing uniform, homogeneous indoor walls, ceilings and floors.

USE

To produce impressive, creatively designed visible and usable surfaces that are subject to normal impact and shock, e.g. in boutiques, restaurants, cafés, prestigious entrance halls, private living areas, exhibition rooms etc.

FEATURES & BENEFITS

- Easy to use
- Excellent adhesion
- High yield
- High surface strength
- Low stress
- Walkable after a short time
- Allows sanding / polishing after 24 hours
- Sealing with recommended sealers to make abrasion and water resistant

THICKNESS APPLICATION

Install from 2 – 4 mm





panDOMO® TerrazzoBasic

PANDOMO® BG

PANDOMO® BW

PANDOMO® BG and BW is a Terrazzo Binder used for producing decorative, mineral-based floors that are rapidly usable and ready for laying as bonded screed or un-bonded screed method.

The terrazzo flooring is shrinkage compensated binding agent combined with locally available aggregates.

USE



To produce a fast track, bonded or unbonded, mineral stone decorative floor covering with premium performance, e.g. in boutiques, shops, hotels, cafés, vestibules, private living areas, exhibition halls etc.

FEATURES & BENEFITS

- Controlled - dimension binder system = virtually no shrinkage and very low tension during hardening and drying
- Rapid usability
- Walkable after just 12 hours
- Grind-able after 36 hours depending on temperature
- Optimised application properties

THICKNESS APPLICATION

Install from 25 – 50 mm

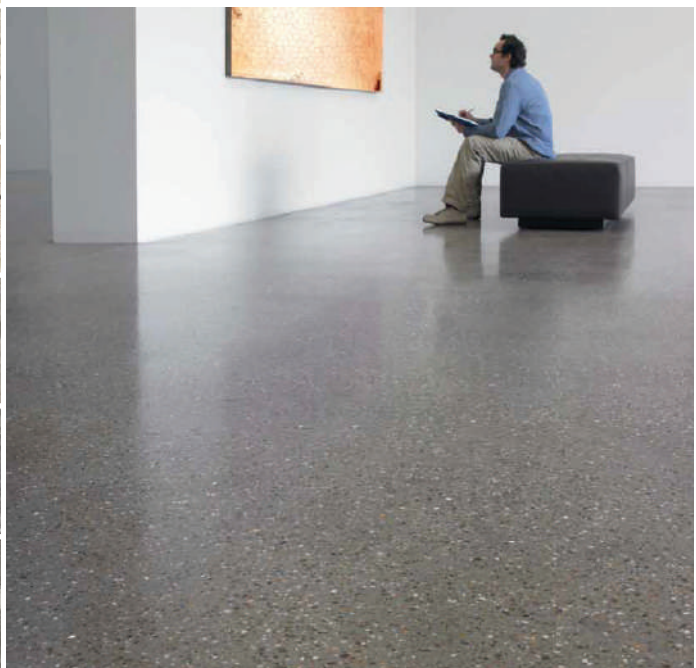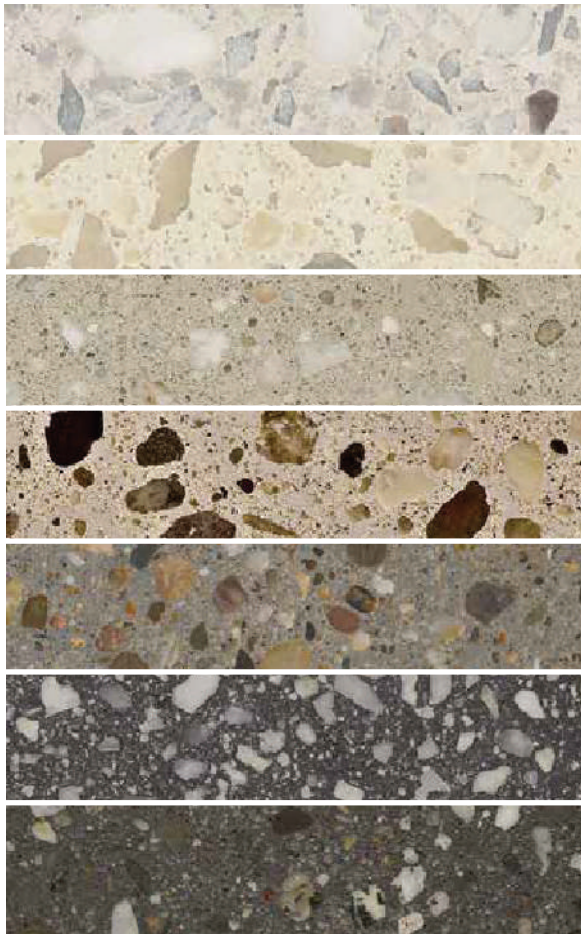





DESIGNER MICRO-TOP

ARDEX K 390

ARDEX K 390 Designer Micro-Top is a self-levelling topping with special formulated polymerised decorative surfaces. It is available in white and grey and is suitable for use in residential and commercial floor areas. ARDEX K 390 provides a smooth and level surface that can install up to a maximum thickness of 10mm in a single application. For high-stress areas, a minimum final thickness of 5mm is recommended.

USE

To produce natural or polishing surfaces that are subject to normal impact and shock, e.g. in boutiques, retail, commercial office spaces, restaurants, cafés, private living areas, exhibition rooms, etc.

FEATURES & BENEFITS

- Levelling and smoothing of floors
- High strength cementitious topping material for residential and commercial areas
- Natural or polishing effect
- For thickness up to 10mm in one application
- Pumpable
- Early trafficable

THICKNESS APPLICATION

Install from 5 – 10 mm





MICROTEC FAIRING COAT

ARDEX F 5

ARDEX F 5 MICROTEC Fibre Reinforced Fairing Coat is a brilliant white polymer modified cementitious light weight fairing coat for used as a decorative surfaces on vertical and overhead application. Its produces a level and smooth finish with high-quality design elements.

USE

For producing a smooth and seamless surface design that desired modern industrial look, e.g. fair faced concrete wall finishes for interior and exterior, boutiques retails, commercial office spaces, restaurants, cafés, private living areas, etc.

FEATURES & BENEFITS

- Microtec fibre reinforcement
- Can be used in areas subject to damp or at risk from water ingress
- Extended working time of 30 minutes
- Slump free and easy to apply
- Internal and external use

THICKNESS APPLICATION

Install from feather edge to 20mm






ARDEX SURFACES OFFERS AN EXCELLENT SELECTION OF COLOURS

Best of all, each shade can be individually modified. The five colour schemes - Light, Natural, Pure, Bright and Accent - are the perfect starting point to realise your interior design.

1. Light

Pastel colours are suitable for modern and elegant public and private spaces, especially for large wall areas.

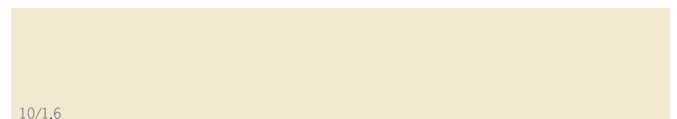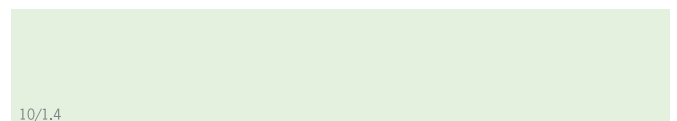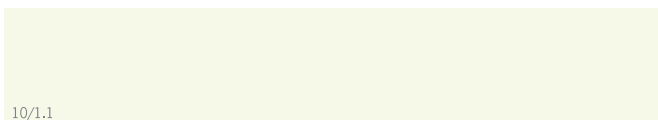


2. Natural

The muted colours of this palette convey a sense of security, tranquility and timelessness and have the effect of soft, diffused daylight. They are versatile for use in private spaces or even country house-styled interiors.



3. Pure

Muted grey tones convey authenticity and accentuates shapes and structures. Stunning in contemporary schemes, lofts and minimalist décor, they are ideal for a sleek, elegant designer interior.

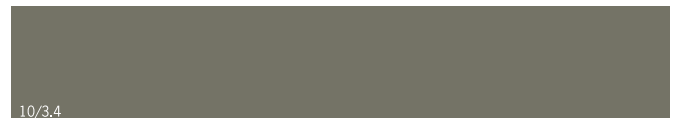

4. Bright

These shades are imbued with joie de vivre and perfect for uplifting areas and work spaces such as nurseries, schools, hospitals and spas. The colours encourage friendly interactions and liveliness.



5. Accent

Bold hues stir the human imagination and have the power to energise and excite. These serve well as accents for urban schemes and modern spaces.





PERFORMANCE
IN ALL AREAS



Singapore**ARDEX-QUICSEAL SINGAPORE PTE. LTD.**

No. 7 Eunos Avenue 8A

Singapore 409460

Tel: +65 6861 7700

Fax: +65 6741 4666

Email: sales@ardex-quickseal.com

SINGAPORE PLANT

No. 26 Tuas Avenue 4

Singapore 639376

Fax: +65 6862 3381

Malaysia**ARDEX QUICSEAL MALAYSIA SDN. BHD.****(Sales & Marketing Office)**

72-2, Jalan Puteri 2/2

Bandar Puteri 47100,

Puchong, Selangor Darul Ehsan

Malaysia

Tel: +603 8051 0311

Email: sales.malaysia@ardex-quickseal.com

MALAYSIA PLANT

No 15 Jalan Desa Tropika 2/2,

Taman Perindustrian Tropika,

81800 Ulu Tiram, Johor

Tel: +607 8620 833, +607 8620 633

Fax: +607 8620 793

Thailand**ARDEX (THAILAND) CO., LTD**

969 2nd Floor Moo, 13, Soi 45, Bangna-Trad Road Bangkaew,

Bangplee, Samutprakarn 10540

Thailand

Tel: +66 2316 3069

Fax: +66 2316 3075

Email: sales@ardex.co.th

Vietnam

Mobile: +84 901 351 308

Email: sales@ardex-quickseal.com

www.ardex-quickseal.com



https://ardex-quickseal.com/products_category/decorative-surfaces

DECORATIVE
SURFACES
SYSTEMS

