QUICSEAL 409

uPVC GROOVE JOINT

Light weight – easy to install

Can be painted over directly with emulsion or solvent based paint

Aesthetically pleasing - enhances the quality of plastered finish

Good fire resistance – does not support combustion

Does not support fungal growth


ARDEX-QUICSEAL SINGAPORE PTE. LTD.
26 Tuas Ave 4 Singapore 639376
Telephone: +65 6861 7700
Fax: +65 6741 4666
Email: sales@ardex-quicseal.com
Website: www.ardex-quicseal.com

QUICSEAL 409

uPVC GROOVE JOINT

DESCRIPTION

QUICSEAL 409 Groove Joint is made from high quality unplasticised polyvinyl chloride (uPVC) materials.
Ideal for forming feature groove lines in plastered walls, QUICSEAL 409 improves the quality of plastered wall finish and reduces inconsistencies due to workmanship QUICSEAL 409 is available in a standard profile to cater to most applications in various plaster thickness.

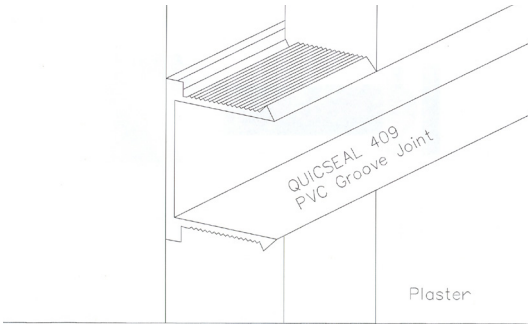

SECTIONAL DETAIL OF QUICSEAL 409

Profile	Supply Dimensions: (W x D)
GJ 6	6 mm x 6mm
GJ 10	10 mm x 7mm
GJ 15	15 mm x 10mm
GJ 20	20 mm x 15mm
GJ 20A	20 mm x 10mm
GJ 30	30 mm x 16mm

Standard length: 2 m per piece.

INSTALLATION INSTRUCTION

1. Select the groove joint profile according to requirement.
2. Measure and mark the required length of the groove joint profile accordingly.
3. Cut QUICSEAL 409 profile using a cutter. Cut edges can be smoothened by using a small file.
4. Set the QUICSEAL 409 with mortar base according to plastering depth.
5. Plaster the wall and finish flush with the plasterwork trim

PACKING

Pack size : 100 lengths per box

IMPORTANT NOTES

The information set forth herein is furnished in good faith and is based on technical data that QUICSEAL considers to be reliable. This information is intended for used by persons having technical skill and at their own discretion and risk. Information contained in this product sheet conforms to the standard detail recommendations and specifications for the installation of QUICSEAL products as of the date of publication of this document. QUICSEAL makes no other warranties and assumes no liability, expressed or implied, as to the architecture, engineering or workmanship of any project. To ensure that you are using the latest, most complete information, contact ARDEX-QUICSEAL

Offices:

Malaysia:
ARDEX QUICSEAL MALAYSIA SDN. BHD.
72-2, Jalan Puteri 2/2 Bandar Puteri 47100,
Puchong, Selangor Darul Ehsan
Malaysia
Phone: +603 8051 0311
Email: sales.malaysia@ardex-quicseal.com

Thailand:
ARDEX (THAILAND) CO., LTD
969 2nd Floor, Moo 13, Soi 45, Bangna-Trad Road
Bangkaew, Bangplee, Samutprakarn 10540 Thailand
Telephone: +66 2316 3069 Fax:+66 2316 3075
Email: sales@ardex.co.th
Website: www.ardex.co.th

Vietnam:
Mobile: +84 901 351 308
Email: sales@ardex-quicseal.com

Reference No.: QS409/270520 T