QUICSEAL 410

Plastering Corner Ruler – GJL 15 / CTL 100 Plaster Stop

Excellent weather resistant properties

Perforated patterns in Plastering Corner Ruler / Plaster Stop sections

ensure maximum anchorage under the plaster.

Can be painted over directly with emulsion or solvent based paint

Good fire resistance – does not support combustion

Does not support fungal growth

ARDEX-QUICSEAL SINGAPORE PTE. LTD.
26 Tuas Ave 4 Singapore 639376
Telephone: +65 6861 7700
Fax: +65 6741 4666
Email: sales@ardex-quicseal.com
Website: www.ardex-quicseal.com

QUICSEAL 410

Plastering Corner Ruler – GJL 15 / CTL 100 Plaster Stop

DESCRIPTION

QUICSEAL 410 is made from high quality unplasticised polyvinyl chloride (uPVC) materials and offers high impact strength while providing excellent impact properties.

USES

QUICSEAL 410 Plastering Corner Ruler is ideal for use as a plastering guide to assist in the finishing and plastering work for the building industry. It is also ideal for use as protection to plasters around corners against impact damage. QUICSEAL 410 Plaster Stop profile provide an edge trim for transformation onto non-tiled surfaces and can be used as a groove former with variable widths on plaster walls.


INSTALLATION INSTRUCTION

1. Select the plastering corner ruler profile according to requirement.
2. Cut QUICSEAL 410 to required length with an aid of a hacksaw and smoothen the cut edge with a small file.
3. Install the QUICSEAL 410 and ensure that it is securely embedded into the plaster.


TECHNICAL DATA

Property / Test Method	Unit	Results
Specific Gravity ASTM D-792	-	1.35 ± 0.05
Vicat Softening Point (1 Kgf load) ASTM D-1525	°C	90 ± 5
Thermal Stability B.S. 2782	Mins	30 ± 5

PLASTERING CORNER RULER PROFILE



CTL 100 Profile
A = 23 mm B = 10 mm

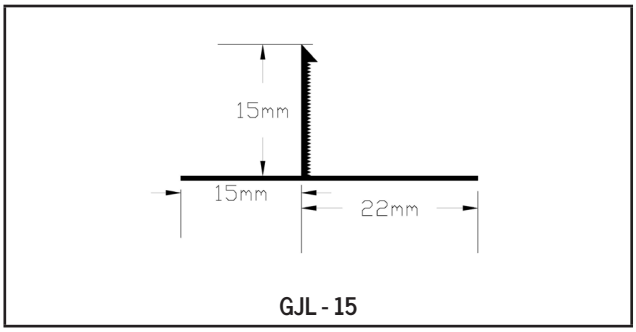

GJL - 15

PACKING

Length : QUICSEAL 410 is available in lengths of 2.5m
Pack size : 50 & 100 lengths per box

Important Notes

The information set forth herein is furnished in good faith and is based on technical data that QUICSEAL considers to be reliable. This information is intended for used by persons having technical skill and at their own discretion and risk. Information contained in this product sheet conforms to the standard detail recommendations and specifications for the installation of QUICSEAL products as of the date of publication of this document. QUICSEAL makes no other warranties and assumes no liability, expressed or implied, as to the architecture, engineering or workmanship of any project. To ensure that you are using the latest, most complete information, contact ARDEX-QUICSEAL

Offices:

Malaysia:
ARDEX QUICSEAL MALAYSIA SDN. BHD.
72-2, Jalan Puteri 2/2 Bandar Puteri 47100,
Puchong, Selangor Darul Ehsan
Malaysia
Phone: +603 8051 0311
Email: sales.malaysia@ardex-quicseal.com

Thailand:
ARDEX (THAILAND) CO., LTD
969 2nd Floor, Moo 13, Soi 45, Bangna-Trad Road
Bangkaew, Bangplee, Samutprakarn 10540 Thailand
Telephone: +66 2316 3069 Fax:+66 2316 3075
Email: sales@ardex.co.th
Website: www.ardex.co.th

Vietnam:
Mobile: +84 901 351 308
Email: sales@ardex-quicseal.com

Reference No.: QS410/270520 T